



THROUGH BOLT ANCHOR

SAYFA
GROUP

1300 301 755
SAYFA.COM.AU

PRODUCT CODE
AP 124

DESCRIPTION
THROUGH BOLT
ANCHOR
M16 X 300mm
15kN RATED



PROPRIETARY ANCHOR SYSTEM FOR SAFE WORK AT HEIGHT

- 316 stainless steel
- High load rating capacity
- Multi-direction use
- Rubber seals supplied for weather-tight seal
- Custom length threads over 300mm can be supplied

PRODUCT BROCHURE



TECHNICAL SPECIFICATION

CODE DESCRIPTION SPECIFICATION SUMMARY

API24 THROUGH BOLT ANCHOR
The XPLORA Through Bolt Anchor used in overhead applications where direct tension is required. System design, supply, layout, installation and certification by a SAYFA approved installer, as per the manufacturer's instructions and current standards.

TECHNICAL DATA

RATING

- Single person use installed rating - 15kN
- Break test peak load rating - 60kN
- Rescue can be performed off the same anchor if situation permits

MATERIALS



- 316 stainless steel

DIMENSIONS

- Eyebolt - diameter 60mm OD, 35mm ID
- Collar - 34mm OD x 16mm
- Threaded rod - M16 x 300mm
- Flange - 70mm OD x 16.5mm ID x 3mm

WEIGHT

- 0.7kg

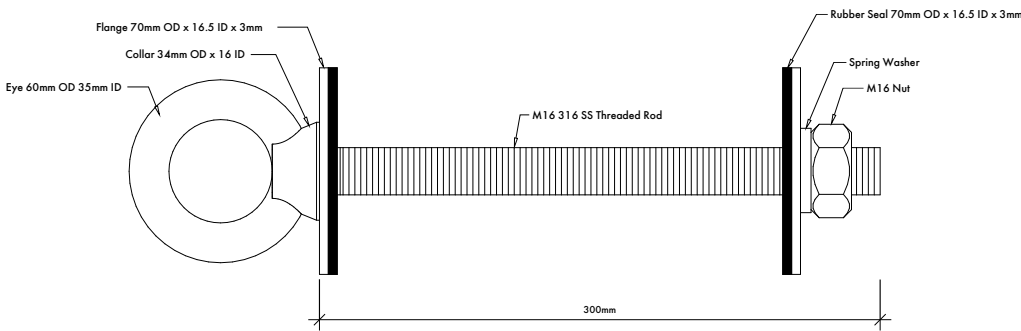

API24 - THROUGH BOLT ANCHOR



BATCH NUMBER

COMPLIANCE

The XPLORA Through Bolt Anchor is designed and manufactured in accordance with requirements of AS/NZS 1891.4:2009, AS/NZS ISO 22846 and AS/NZS 5532:2013.

TESTING

Testing and performance based on AS/NZS1891.4:2009. & AS/NZS5532.2013

- Dynamic load test - 15kN
- Static load test - 15kN

PRODUCT WARRANTY

10 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations.

INSPECTION AND MAINTENANCE

The XPLORA Through Bolt Anchor needs to be checked and recertified by a competent height safety inspector every 12 months for non corrosive environments or 6 monthly for corrosive or harsh environments. (To be determined by competent person depending on the severity of surrounding conditions.)

IMPORTANT NOTE

Minimum thickness of concrete - 150mm. Thickness less than 150mm requires compliance by having structure certified and the anchor proof load tested as per AS/NZS 1891.4:2009. Device is for personnel use only.

PRODUCT DISCLAIMER LINK

[SAYFA.COM.AU/WP-CONTENT/UPLOADS/2019/07/PRODUCT-DISCLAIMER_02.07.2019_SS.PDF](https://www.sayfa.com.au/wp-content/uploads/2019/07/PRODUCT-DISCLAIMER_02.07.2019_SS.PDF)



API24 - THROUGH BOLT ANCHOR

Designed and manufactured by Sayfa Group. For all technical assistance contact Sayfa Group. SAYFAGROUP 23.06.2021



1029 MOUNTAIN HWY
BORONIA VIC 3155
AUSTRALIA

T 1300 301 755
F 1300 881 092
E SALES@SAYFA.COM.AU

FOR MORE INFORMATION
VISIT SAYFA.COM.AU

