




BOLT ON ANCHOR



1300 301 755
SAYFA.COM.AU

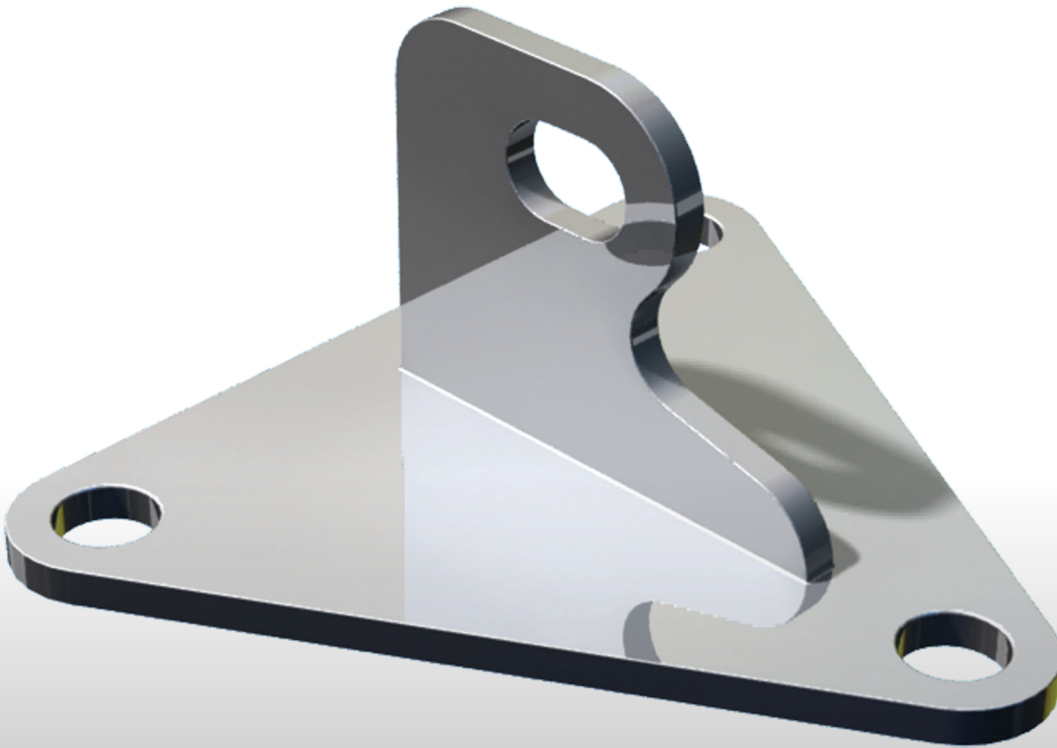

FALL ARREST ANCHOR BRACKET FOR MULTIPURPOSE FALL ARREST & ROPE ACCESS USE

- MULTIPURPOSE ANCHOR PLATE
- NON-CORROSIVE 316 STAINLESS STEEL
- HIGH LOAD RATING CAPACITY

PRODUCT
SPECIFICATION

PRODUCT CODE
SL 206

DESCRIPTION
BOLT ON ANCHOR

PRODUCT
BROCHURE



TECHNICAL SPECIFICATION

SYSTEM CODE **SL200**
PRODUCT CODE **SL206**

TECHNICAL DATA

RATING

- Fall arrest (1 user) - 15kN
- Fall arrest (2 user) - 21kN
- Rope access - 12kN
- Break test peak load - 52.4kN

MATERIALS

- 316 stainless steel

DIMENSIONS

- Length - 140mm
- Width - 155mm
- Height - 70mm
- Thickness - 6mm


WEIGHT

- 0.77kg - excluding fixings

FIXINGS

- Concrete fixing - M12 Trubolt/ Chemset/ HSL M12 or similar (see AS/NZS 1891.4 sec 3.1 2G regarding masonry fixing)
- Steel fixing - M12 Bolts Class 8.8 or M14 SS bolt (fixings & substructure must be verified by engineer)

(Refer instruction manual)

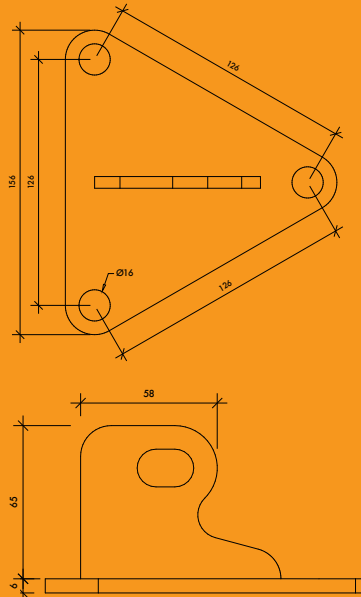

SL200 - CONCRETE MOUNT APPLICATION

COMPLIANCE

The SL206 is designed and manufactured in accordance with requirements of Australian Standards AS/NZS 1891.4:2009, AS/NZS 4488.2:1997 and AS/NZS 5532:2013

TESTING

Testing and performance based AS1891.4:2009.

- Dynamic load test - 15kN
- Static load test - 15kN

PRODUCT WARRANTY

10 years from date of purchase subject to correct installation, use and maintenance in accordance with manufacturer's specifications and recommendations.

INSPECTION AND MAINTENANCE

This device requires periodic inspection and maintenance by a qualified safety inspector
(Refer instruction manual.)

IMPORTANT NOTE

Minimum thickness of concrete - 150mm
Anchor point requires proof load testing prior to use as per AS/NZ 1891.4:2009

DISCLAIMER

All product specifications and technical descriptions, recommendations and other information provided, are given as general guidance and advice, and are to be read in conjunction with Sayfa Group installation instructions and any other data available and applicable to each particular standard product or system. Use of such data is however the user's sole responsibility, taking into account the intended application and actual conditions existing on the particular worksite. Consequent selection of the right product for any particular use, remains the user's ultimate responsibility. Sayfa Group is therefore not obligated or liable for any direct or indirect, incidental or consequential damages, losses or expenses in connection with, or by reason of the suitability and use of or otherwise, any product or system for any purpose. Implied warranties of merchantability or fitness for any particular purpose, are specifically excluded.

All Sayfa Group products must be installed and used by competent personnel trained in the selection, safe use and maintenance of fall arrest systems and equipment by a registered training organisation (RTO). Installation not in accordance with Sayfa Group requirements or the use of non Sayfa Group components will void all certification and warranties.

Suitability of support structure and design layout of system is the responsibility of the installer and should be verified by a structural engineer or a site specific live load test done to ensure conformance. Maintenance and usage of the system in accordance with Sayfa Group requirements is the responsibility of the owner or manager of the workplace.

Designed and manufactured by Sayfa Group. For all technical assistance contact Sayfa Group. SAYFAGROUP-26.6.2015



1029 MOUNTAIN HWY
BORONIA VIC 3155
AUSTRALIA

T 1300 301755
F 1300 881092
E INFO@SAYFA.COM.AU

FOR MORE INFORMATION
VISIT SAYFA.COM.AU

